

B10-2



SUCTION CUP WITH SHORT BELLOWS

- ▶ Suitable for level adjustment.
- ▶ Lifting movement to separate small and thin objects.
- ▶ Only lightweight objects should be handled when the lifting force is parallel to the surface.

LIFTING FORCES & TECHNICAL DATA

Lifting force vertical to the surface, N, at vacuum level			Lifting force parallel to the surface, N, at vacuum level			Volume cm ³	Min. curve radius mm	Max. vertical movement mm	Weight rubber part g
20 -kPa	60 -kPa	90 -kPa	20 -kPa	60 -kPa	90 -kPa				
1.5	3.4	4.9	—	—	—	0.48	4.0	4.5	1.0

MATERIAL SPECIFICATIONS


Material	Colour	Hardness °Shore A	Temperature range °C
Chloroprene, CR	Black	60	-40–110
Silicone, SIL	Red	50	-40–200

MATERIAL RESISTANCE


Material	Wear resistance	Oil	Weather & ozone	Hydrolysis	Petrol	Concentrated acids	Alcohol	Oxidation
Chloroprene, CR	Excellent	Fair	Good	Good	Fair	Poor	Good	Good
Silicone, SIL	Good	Poor	Excellent	Fair	Poor	Poor	Good	Excellent

ORDERING INFORMATION

Complete suction cups	Art. No.
Suction cup B10-2 Chloroprene, M5 male	3150023
Suction cup B10-2 Silicone, M5 male	3150023S

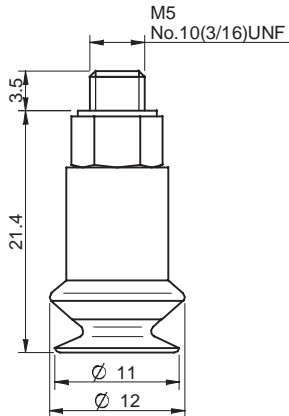

Rubber parts	Art. No.
Suction cup B10-2 Chloroprene	3150101
Suction cup B10-2 Silicone	3150101S



Fittings	Art. No.
Fitting M5 male, 10-15	3107030

For further information and dimensioned drawings, see *SUCTION CUPS FITTINGS* chapter.

Suction cups
B